



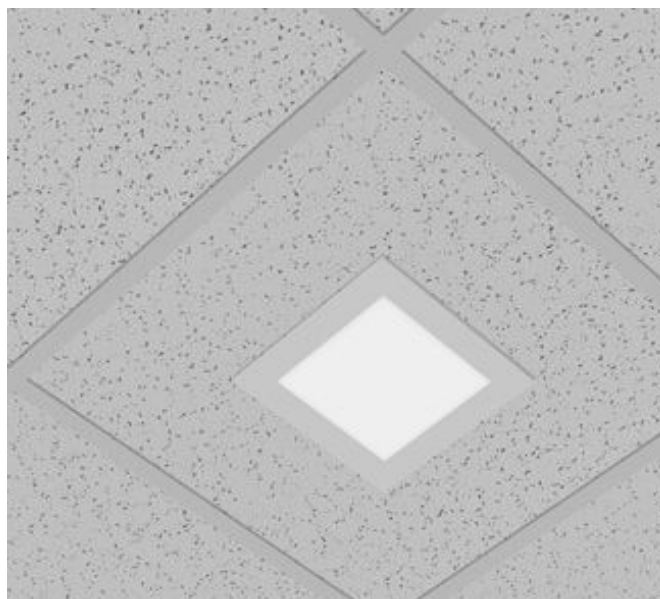

KL 125 Downlight

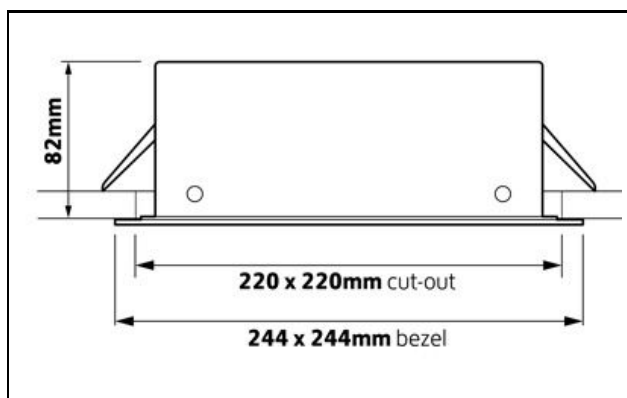

Recessed LED Illuminated Light Box
Uniform Light Distribution with Back Lit Design
Short circuit, overload and Temperature protection
Compliments LED Panels
Supplied with side wings for easy installation

Lumi-
naire
output Specification:-

5w	830K / 407lm	840K / 444lm
10.2w	830K / 884lm	840K / 966lm
15.3w	830K / 1217lm	840K / 1326lm

Bezel Colours:- White,

Options:-

Switch DIM / Dali or DSI

Emergency Options:

ILEM , 3hr Emergency Conversion, 3 hour Self

[For more information on the product
please contact sales@keenlight.com](mailto:sales@keenlight.com)

keenlight

Oak Lodge, Horsham Road, Crawley RH11 9HQ
T: 01293 511699 W: www.keenlight.com E: sales@keenlight.com

