




KL 133

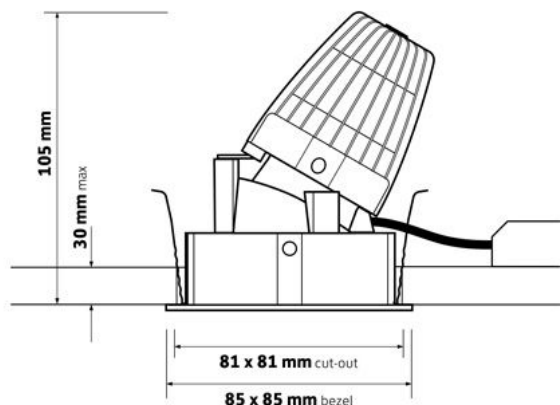

Low Glare Architectural LED Wallwash

Available in :-White Black or Silver

With integral IP44 protective lens and deep matt black darklight baffle to minimise glare as standard.

Softlight baffle as an Option

Plaster-in kit available

35 Degree and 32 Degree Reflectors

Other fittings in this range:-

KL130 - Circular fixed downlight

KL 131 - Circular Wall Wash

KL 132 - Square Fixed

Luminaire Output Specification

Luminaire Power CRI80 3000K CRI80 4000K

8.5w 554 lumens 578 lumens

10.5w 719 lumens 749 lumens

Options:-

SwitchDIM, DALI or DSI

Emergency Conversion

DALI and self test EM Conversion

Single point Connection to ILEM product

**For more information on the product
please contact sales@keenlight.com**

keenlight

Oak Lodge, Horsham Road, Crawley RH11 9HQ
T: 01293 511699 W: www.keenlight.com E:

