




KLRA-C93

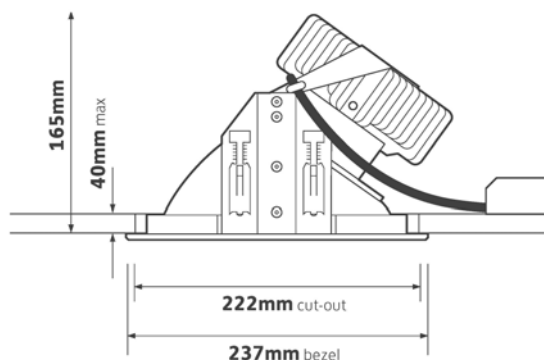

LED recessed circular
asymmetric

Fixed die cast white bezel

Optimised thermal management system

Satin edged reflector

Luminaire Output Specification

12w	830K / 863 lumens
10.9w	840K / 862 lumens
20.8w	830K / 1570 lumens
19w	840K / 1568 lumens
30.3w	830K / 2352 lumens
27.8w	840K / 2350 lumens

60,000 Life

Options:

- Emergency single point connection to ILEM
- 3 hour Emergency Conversion
- 3 hour Self Test Emergency Conversion
- 3 hour DALI addressable EM Conversion

For more information on the product
please contact sales@keenlight.com



keenlight.

Oak Lodge, Horsham Road, Crawley RH11 9HQ
T: 01293 511699 W: www.keenlight.com E: sales@keenlight.com